


Changing Frequency

Music 171: Frequency Modulation

Tamara Smyth, trsmyth@ucsd.edu
 Department of Music,
 University of California, San Diego (UCSD)
 November 15, 2019

- We have already seen (in Assignment 1) how we can linearly change the frequency of a sinusoid using the `line~` object.



- This signal is generally called a *chirp*, as it sweeps from one frequency
- Logarithmic chirps, as well as other *continuous* changes in frequency are also possible.

1

Music 171: Frequency Modulation

2

Vibrato


Vibrato Simulation

- **Vibrato**: a wavering of pitch.
 - occurs in the singing voice and musical instruments (e.g. violin, wind instruments, the theremin, etc.)
 - often due to human control *after* note onset;
 - center frequency f_c is modulated by a sinusoid with frequency f_m yielding `osc~` frequency:


$$f_i = f_c + d \sin(2\pi f_m t),$$

where d is the frequency deviation from f_c .

- example: $f_c = 220$ Hz, $f_m = 3$ Hz, and $d = 3$:

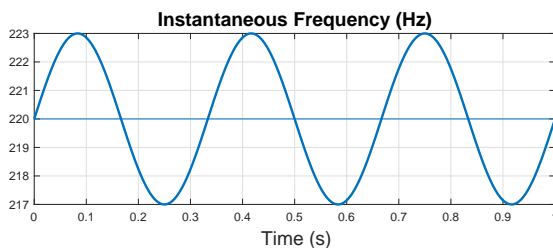

- As a sinusoid `osc~` modulated the *amplitude* of a carrier in AM/RM, so can it modulate the *frequency* of a carrier to implement FM vibrato:



- The *width* of the vibrato (the deviation from the carrier frequency) determined by amplitude d .
- The *rate* of the vibrato, determined by f_m .
- To be perceived as vibrato, rate **must be below the audible frequency range** (LFO) and the width (amplitude) made small.

FM Synthesis of Musical Instruments

- When the vibrato rate is increased to a frequency in the audio range, and when the width is made larger, the technique can be used to create a broad range of distinctive timbres.
- Frequency modulation (FM) synthesis was invented by John Chowning at Stanford University's *Center for Computer Research in Music and Acoustics* (CCRMA).
- FM synthesis uses fewer oscillators than either additive or AM synthesis to introduce more frequency components in the spectrum.

FM Sidebands

- The upper and lower sidebands produced by FM are grouped in pairs according to the harmonic number of f_m , that is, frequencies present are given by $f_c \pm kf_m$.

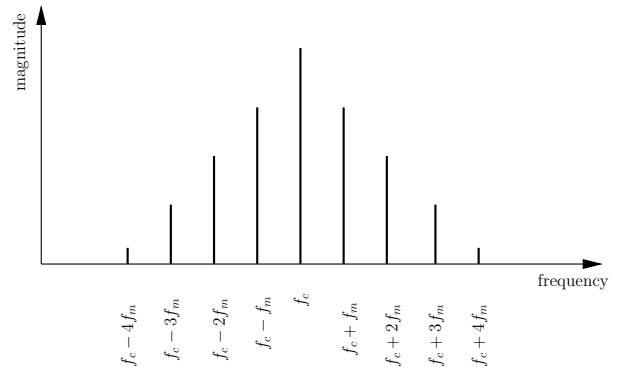


Figure 1: Sidebands produced by FM synthesis.

FM Bandwidth

- The deviation d (amplitude of the modulator) acts as a control of FM bandwidth and is usually set as the product of f_m and the **modulation index** I :

$$d = If_m$$

so that instantaneous frequency is

$$f_i = f_c + If_m \sin(2\pi f_m t).$$

- Modulation index I determines **harmonic content**:
 - in general, the highest sideband that has significant amplitude is *approximately*


$$k_{\max} = I + 1.$$

- If $I(t)$ is time varying, the timbre of a tone can change over time (as do musical sounds!).
- Though calculating the actual amplitude of sidebands is beyond the scope here, it is interesting to know they can be described by **Bessel functions**.

FM Spectrum—Actual vs. Bessel


- The following shows the spectrum and sideband amplitudes calculated using Bessel functions for FM parameters:

$$f_c = 150, \quad f_m = 10, \quad I = 5.$$

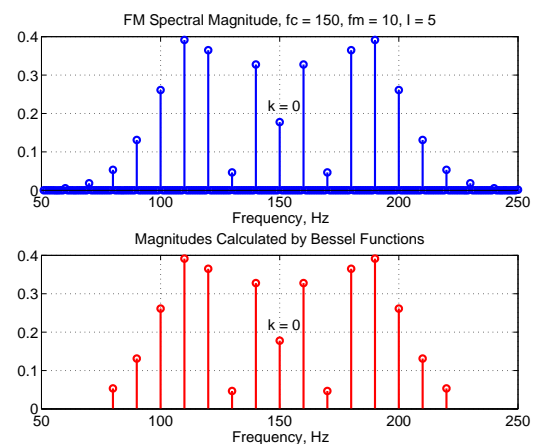


Effect of Phase in FM

- If the FM spectrum spreads downward below 0 Hz, “negative” components are folded over the 0 Hz axis to their corresponding positive frequencies.

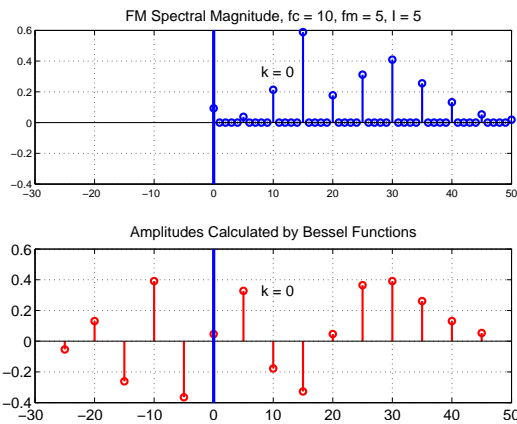

Changing Carrier Phase


- Furthermore, if the carrier is an odd function, the act of folding reverses the phase.

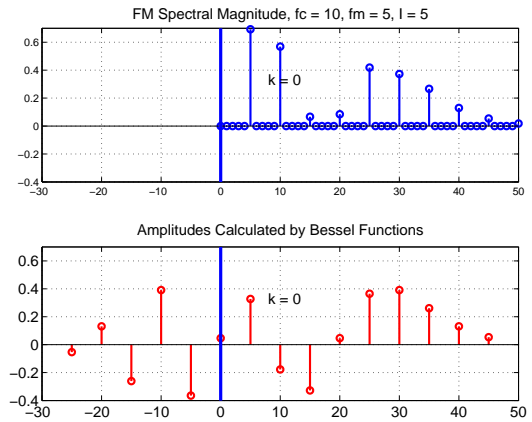

- Notice the cancellation at DC.

Carrier as Even Odd Functions

- Notice how the difference in carrier phase is concentrated in the low-frequency region where overlap from the 0 Hz axis causes constructive/destructive interference.

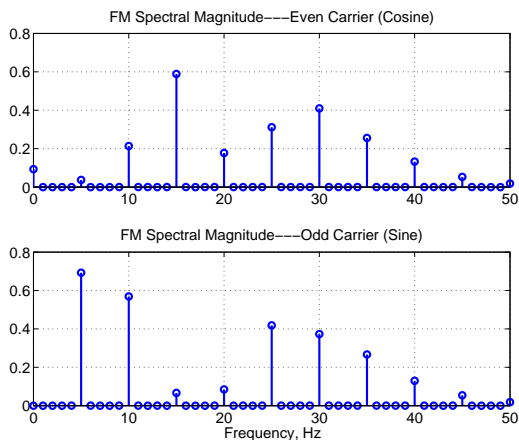

Fundamental Frequency in FM

- The fundamental (or sounding) frequency of an FM sound, is found by first representing the ratio of the carrier and modulator frequencies in reduced form:

$$\frac{f_c}{f_m} = \frac{N_1}{N_2}$$

(N_1 and N_2 are integers with no common factors).

- The fundamental frequency is then given by

$$f_0 = \frac{f_c}{N_1} = \frac{f_m}{N_2}$$


- Example: carrier frequency $f_c = 10$ and modulator frequency $f_m = 5$ yields the ratio in reduced form:

$$\frac{f_c}{f_m} = \frac{10}{5} = \frac{2}{1} = \frac{N_1}{N_2}$$

and a fundamental frequency of

$$f_0 = \frac{f_c}{N_1} = \frac{10}{2} = \frac{f_m}{N_2} = \frac{5}{1} = 5.$$

Exponential Envelope in Pd

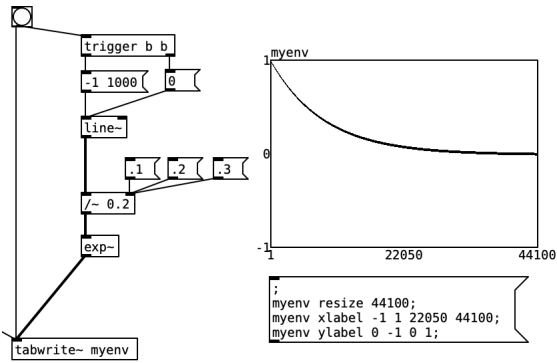

Some FM instrument examples

- When implementing simple FM instruments, we have these main parameters that will effect the overall sound:
 1. The carrier and modulator frequency and phase
 2. The maximum modulating index
 3. The envelopes that define how the amplitude and modulating index evolve over time.
- Using the information taken from John Chowning's article on FM we may develop envelopes for the following simple FM instruments:
 - bell-like tones,
 - wood-drum
 - brass-like tones
 - clarinet-like tones

FM Instrument Envelopes

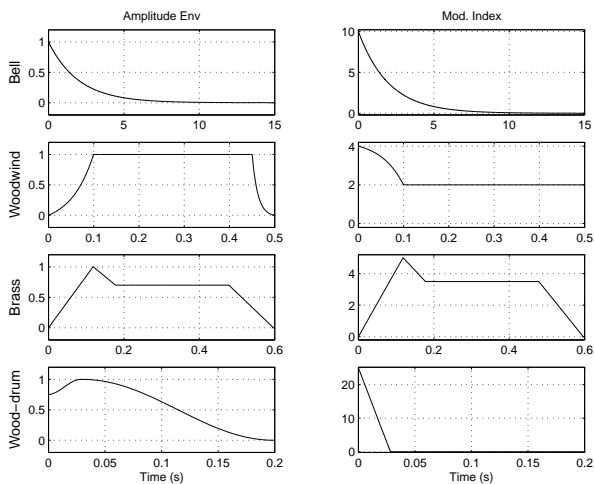


Figure 2: Envelopes for FM bell-like tones, wood-drum tones, brass-like tones and clarinet tones.

FM Instrument Parameters

| | f_c | f_m | I_{MIN} | I_{MAX} |
|----------|--------|--------|-----------|-----------|
| bell | 110 | 220 | | 10 |
| | 150 | 350 | | 5 |
| brass | f_0 | f_0 | | 2.66-5 |
| clarinet | $3f_0$ | $2f_0$ | 2 | 4 |
| woodrum | 80 | 55 | | 25 |